



SA-035  
说明书/User Manual V1.0

中文--1-11 English--12-22 FCC Warning--23

### 使用说明

**1 断电**



设备安装、故障维修请由专业资质电工操作。切勿在设备通电时进行接线操作或触碰到接线端子,以免发生触电危险!

**2 接线**



通电后,设备首次使用,默认进入蓝牙配网模式,Wi-Fi指示灯呈两短一长闪烁状态。

**3 下载“易微联”App**



**4 上电**



### 兼容配网模式

如使用蓝牙配网模式配网失败,请使用“兼容模式”进行配对。

**1 长按配对按钮5秒直到Wi-Fi指示灯呈“两短一长闪烁”状态,松开。再次长按配对按钮5秒直到Wi-Fi指示灯呈“快闪”状态,此时设备进入兼容模式。**

**2 在App界面,点击“+”,选择“兼容模式”。**

先把移动设备连接上Wi-Fi账号为:ITEAD-\*\*\*\*\*,密码为:12345678,然后回到“易微联”App,点击“下一步”等待配对完成。

### 与轻智能遥控器配对

支持与本设备配对的轻智能遥控器型号:

RM2.4G
SA-025-RM2.4G-1C
SA-025-RM2.4G-2C
SA-025-RM2.4G-3C

**1 点开已添加的设备,点击右上角设置图标。**



**2 选择“轻智能遥控器”。**



**3 根据提示进行下一步操作,遥控器指示灯闪烁一下,即配对成功。**



**添加设备**



**注: 如需删除RM2.4G遥控器,进入添加的遥控器界面,删除即可**

### 产品参数

型号	SA-035
输入	100-240V~50/60Hz 16A Max
输出	100-240V~50/60Hz 16A Max
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
App支持系统	Android & iOS
外壳材料	PC V0
产品规格	41x41x20mm

### 产品介绍



Wi-Fi信号指示灯状态说明

Wi-Fi指示灯状态	状态描述
两短一长闪烁	蓝牙配网模式
常亮	设备在线
快闪一下	未连接服务器
快闪二下	已连接服务器,但未连接到云端
快闪三下	断线并重启

### 恢复出厂设置

在eWeLink App端“删除设备”,设备即恢复出厂设置。

### 常见问题

#### Wi-Fi设备与eWeLink APP 配对失败.

- 确保设备处于配对模式。三分钟没进行配网,设备将自动退出配对模式。
- 请关闭定位服务并允许定位权限。在选择Wi-Fi网络之前,请关闭定位服务并允许定位权限。位置信息权限用于获取Wi-Fi列表信息。如果单击禁用,您将无法添加设备。
- 确保您的Wi-Fi网络为2.4GHz频段。
- 确保您输入了正确的Wi-Fi SSID和密码,没有包含特殊字符。密码错误是配对失败的一个非常常见的原因。
- 配对时设备靠近路由器,以保证良好的传输信号条件。

#### Wi-Fi设备“离线”提醒, 请通过Wi-Fi LED指示灯状态检查以下问题:

LED指示灯每2秒闪烁一次,表示您无法连接到路由器。

- 可能您输入了错误的Wi-Fi SSID和密码。
- 确保您的Wi-Fi SSID和密码不包含特殊字符,例如阿拉伯数字、特殊符号、我们的系统无法识别这些字符,因此无法连接到Wi-Fi。
- 可能您的路由器承载能力较低。
- 可能是Wi-Fi信号较弱。您的路由器距离您的设备太远,或者路由器和设备之间可能存在阻碍信号传输的障碍物。
- 确保设备的MAC不在您的MAC管理名单中。

#### LED指示灯重复闪烁两次表示您无法连接到服务器。

- 确保互联网连接正常。您可以使用您的手机或PC连接互联网,如果无法访问,请检查互联网连接的可用性。
- 可能您的路由器承载能力低。连接到路由器的设备数量超过其最大值。请确认您的路由器可以携带的最大设备数量。如果超过,请删除一些设备或换一个更大的路由器再试。

3. 请联系您的ISP并确认我们的服务器地址没有被屏蔽

cn-dsp.coolkit.cc (中国大陆)  
as-dsp.coolkit.cc (亚洲除中国外)  
us-dsp.coolkit.cc (在美国)

如通过以上方法均无法解决此问题,请通过eWeLink App上的帮助&反馈提交您的请求。



扫码或搜索“易微联”关注公众号获取更多帮助。


易微联已经打通主流AI语音平台。如果您希望用户快速确认产品与某些平台智能音箱兼容,厂商可额外印刷易微联Logo的“Works with AI平台”的海报版本,并随产品说明书内置于包装之内。



① 采用易微联平台的智能产品在主流AI语音平台Logo之前需获得相应的平台认证。如果厂商将此版本印刷于包装上,请根据产品的实际认证情况进行判断。


### Operating Instruction

**1 Power off**

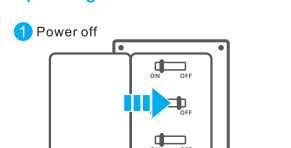


Please install and maintain the device by a professional electrician. To avoid electric shock hazard, do not operate any connection or contact the terminal connector while the device is powered on!

**2 Wiring instruction**

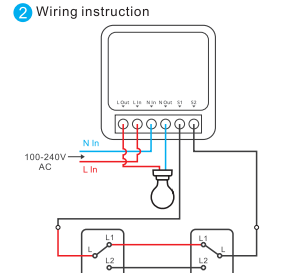


S1/S2 can connect with the rocker light switch or doesn't connect. To ensure safety, do not connect the neutral wire and live wire to it.

**3 Download the eWeLink APP**




**4 Power on**

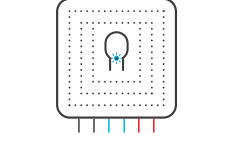

After powering on, the device will enter the Bluetooth Pairing Mode during the first use. The Wi-Fi LED indicator changes in a cycle of two short and one long flash and release.

**5 Add the device**

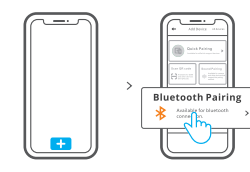

Tap "+" and select "Bluetooth Pairing", then operate following the prompt in the App.

### Compatible Pairing Mode

If you fail to enter Bluetooth Pairing Mode, please try "Compatible Pairing Mode" to pair.

**1** Long press Pairing button for 5s until the Wi-Fi LED indicator changes in a cycle of two short flashes and one long flash and release. Long press Pairing button for 5s again until the Wi-Fi LED indicator flashes quickly. Then, the device enters Compatible Pairing Mode.

**2** Tap "+" and select "Compatible Pairing Mode" on APP.


Select Wi-Fi SSID with ITEAD-\*\*\*\*\* and enter the password 12345678, and then go back to eWeLink APP and tap "Next". Be patient until pairing completes.

### Pairing with eWeLink-Remote control


Supported pairing eWeLink-Remote control models:

RM2.4G
SA-025-RM2.4G-1C
SA-025-RM2.4G-2C
SA-025-RM2.4G-3C


**1 Open the added device and click the settings icon in the upper right corner.**

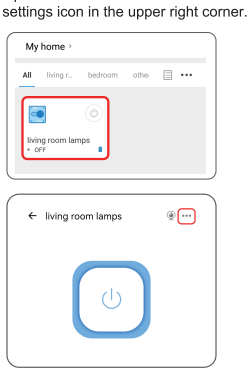

**2 Select "eWeLink Remote".**

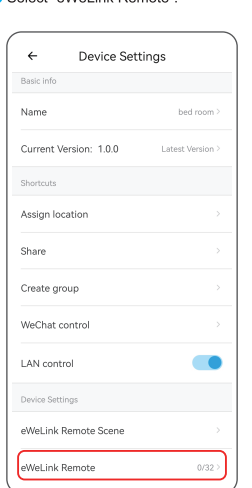

**3 Follow the prompts for the next step. The LED indicator flashes once again" means the pairing is successful.**

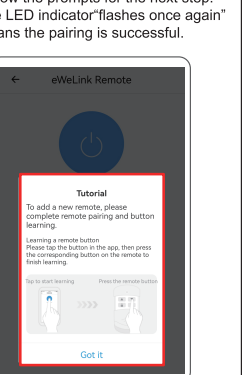


**Note: If you need to delete the RM2.4G remote control, enter the added interface and delete it.**

### Specifications

Model	SA-035
Input	100-240V~50/60Hz 16A Max
Output	100-240V~50/60Hz 16A Max
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
App operating systems	Android & iOS
Shell material	PC V0
Dimension	41x41x20mm

### Product Introduction



Wi-Fi LED indicator status instruction

LED indicator status	Status instruction
Flashes (one long and two short)	Bluetooth Pairing Mode
Keeps on	Device is online
Flashes quickly once	Fail to connect to router
Flashes quickly twice	Connected to router but fail to connect to server
Flashes quickly three times	Firmware Updating

### Factory Reset

Deleting the device on the eWeLink app indicates you restore it to factory setting.

### Common Problems

**Fail to pair Wi-Fi devices to eWeLink APP**

- Make sure the device is in pairing mode. After three minutes of unsuccessful pairing, the device will automatically exit pairing mode.
- Please turn on location services and allow location permission should be allowed. Location information permission is used to obtain Wi-Fi list information. If you click Disable, you will not be able to add devices.
- Make sure your Wi-Fi network runs on the 2.4GHz band.
- Make sure you entered a correct Wi-Fi SSID and password, no special characters contained. Wrong password is a very common reason for pairing failure.
- The device shall get close to the router for a good transmission signal condition while pairing.

**Wi-Fi devices "offline" issue. Please check the following problems by the Wi-Fi LED indicator status:**

The LED indicator blinks once every 2s means you fail to connect to the router.

- Maybe you entered the wrong Wi-Fi SSID and password.
- Make sure that your Wi-Fi SSID and password don't contain special characters, for example, the Hebrew, Arabic characters, our system can't recognize these characters and then fail to connect to the Wi-Fi.
- Maybe your router has a lower carrying capacity.
- Maybe the Wi-Fi strength is weak. Your router is too far away from your device, or there may be some obstacles between the router and device which blocks the signal transmission.
- Be sure that the MAC of the device is not on the blacklist of your MAC management.


**The LED Indicator flashes twice on repeated means you fail to connect to the server.**

- Make sure the Internet connection is working. You can use your phone or PC to connect to the internet, and if it fails to access, please check the availability of the internet connection.
- Maybe your router has a low carrying capacity. The number of devices connected to the router exceeds its maximum value. Please confirm the maximum number of devices that your router can carry. If it exceeds, please delete some devices or get a larger router and try again.

3. Please contact your ISP and confirm our server address is not shielded.

cn-dsp.coolkit.cc (in Asia mainland)  
as-dsp.coolkit.cc (in Asia except China)  
us-dsp.coolkit.cc (in US)  
if none of the above methods solved this problem, please submit your request via help&feedback on the eWeLink App.

eWeLink has integrated with mainstream AI platforms. To ensure users can know quickly which platforms/smart speakers are compatible with products, manufacturers can print the poster version with "Works with AI" of eWeLink logo and attach it in the package with the user manual.



① Smart products supporting eWeLink APP need get the certification of the corresponding platform before using the logo of AI voice platforms. Please refer to the product certification to make a decision if manufacturers use the version on the package.

### FCC Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

物料名称：SA-035 说明书 V1.0

材料工艺：105g铜版纸 4色印刷 手风琴12折页

尺寸规格：展开 480x80mm 折后 40x80mm

编制日期：2022.06.16

备注：